


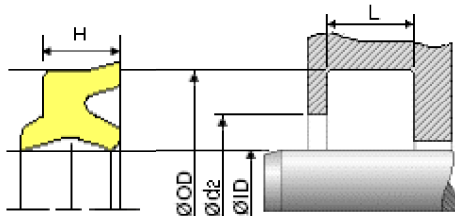

H Rod Wiper

[sizes](#)


Features

The Type H wiper is highly impact resistant to meet the demands of fluid power equipment, and the double lip provides both sealing and wiping action in one component. The wiper is ozone and radiation resistant. Exposure to sun, weather, UV, and other outdoor environments have very little effect, and it's found in many of today's industrial applications where no rod leakage is allowable.

- for heavy-duty applications
- contamination resistant
- self-venting

Applications



- bulldozers
- construction equipment
- forklifts
- mobile lifts
- agricultural equipment
- injection molding machines
- mobile arm trucks
- general cylinders

Materials

Material	Polyurethane HU2093 YL
Hardness	93 Shore A
Material	Hytrel HT2053 OR
Hardness	52 Shore D
Material	Hytrel HT2047 N
Hardness	47 Shore D

Operating Limits

The operating limits of this seal are highly dependant on the application. Combinations of pressure, temperature, fluid medium and other factors, all greatly effect the performance and longevity of the seal.

Speed	4.2 ft/s / 1.4 m/s
Temperature (Typ.)	up to 100 °C / 212 °F

Installation

For complete Installation Instructions, [click here](#).