




## Rubberized fabric MT

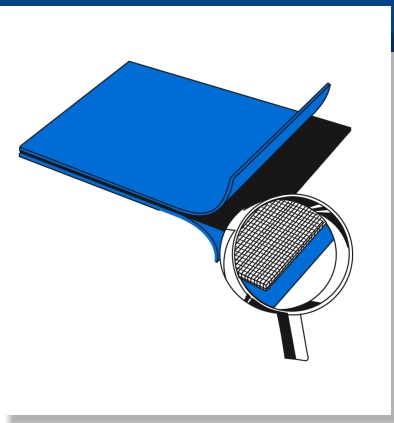

### DESCRIPTION

- Special fabric coated on both sides with suitable elastomer grades
- Punching of flat membranes from membrane cloths possible without problems
- Material: CR, ECO, EPDM, NBR

### FUNCTION

- Thin, well adhering and non-porous elastomer layers

### PRODUCT ADVANTAGES

- Highest quality
- Long service life

### APPLICATIONS

- Measuring, regulating or control diaphragms
- Pumping diaphragms
- separating diaphragms
- Flat diaphragms

### APPLICATION LIMITS

- Permissible maximum values depending on the other operating conditions, see technical manual.

### MEDIA RESISTANCE

- Please refer to resistance information in the chemical resistance guide at [www.fst.com](http://www.fst.com).

### CONFORMITY AND CERTIFICATES

- Please consult the material data sheet valid for the respective material for current information on approvals and certificates, as this information depends on the compound and cannot be listed exhaustively here.

### DESIGN GUIDELINE

- Please refer to the technical manual for design guidelines.

### INSTALLATION GUIDELINE

- The prerequisite for perfect function of the seal is careful installation in accordance with the technical manual.

### STORAGE ADVISE

- Storage temperature <25°C
- No direct heat sources
- No direct sunlight
- No condensation in the storage room
- No exposure to ozone or ionizing radiation
- Recommendations based on the revision of ISO 2230 dated 16.09.1992

