




Packing ring TFW

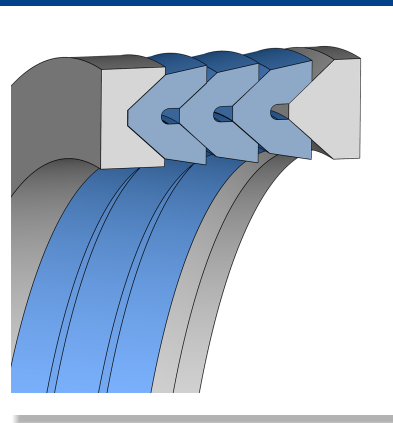

DESCRIPTION

- V-shaped
- Consists of saddle ring, 3-5 angle rings and counter ring
- Five to seven pieces
- Material: PTFE

FUNCTION


- Sealing of piston rods

PRODUCT ADVANTAGES

- High chemical resistance
- High temperature resistant
- Low breakaway force even after long downtimes
- Low friction
- Highest quality
- Long service life

APPLICATIONS

- Axially moving valve spindles, rods and plungers as well as slowly rotating shafts
- Joint shafts
- Rolling mills
- Shafts and cardan shafts against dust

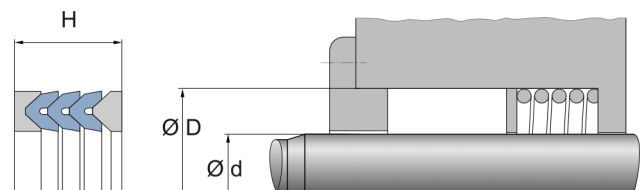

APPLICATION LIMITS

- Permissible maximum values depending on the other operating conditions, see technical manual.

MEDIA RESISTANCE

- Please refer to resistance information in the chemical resistance guide at www.fst.com.

CONFORMITY AND CERTIFICATES

- Please consult the material data sheet valid for the respective material for current information on approvals and certificates, as this information depends on the compound and cannot be listed exhaustively here.

DESIGN GUIDELINE

- Please refer to the technical manual for design guidelines.

INSTALLATION GUIDELINE

- The prerequisite for perfect function of the seal is careful installation in accordance with the technical manual.

STORAGE ADVISE

- Storage temperature <math>< 25^{\circ}\text{C}</math>
- No direct heat sources
- No direct sunlight
- No condensation in the storage room
- No exposure to ozone or ionizing radiation
- Recommendations based on the revision of ISO 2230 dated 16.09.1992