


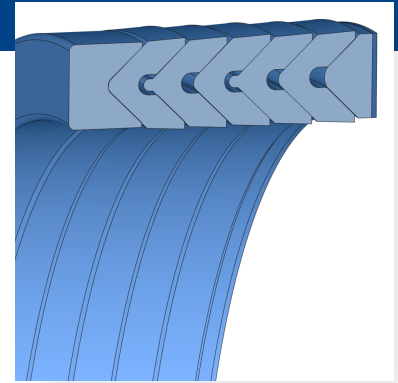

Chevron type seal set Merkel® DMS7-0889

DESCRIPTION

- Five cuffs
- Combined with pressure and support ring
- Installation in axially open installation space with cover

FUNCTION

- Sealing of piston rods
- Use with one-sided pressure load
- Sealing effect due to axial preload in the installation space
- Preload via axially adjustable cover

CONFORMITY AND CERTIFICATES

- Please consult the material data sheet valid for the respective material for current information on approvals and certificates, as this information depends on the compound and cannot be listed exhaustively here.

PRODUCT ADVANTAGES

- High chemical resistance
- High pressure creep resistance
- Market-leading, proprietary design with the widest range of applications in all industries and for a variety of requirements
- Suitable for high-temperature applications
- Highest quality, durability and safety
- Best results in total cost of ownership
- Meets FDA and EU10/2011 requirements


INSTALLATION GUIDELINE

- Please follow the QR code or hyperlink to the technical manual to obtain further information and instructions.




STORAGE ADVISE

- Storage temperature <25°C
- No direct heat sources
- No direct sunlight
- No condensation in the storage room
- No exposure to ozone or ionizing radiation
- Recommendations based on the revision of ISO 2230 dated 16.09.1992

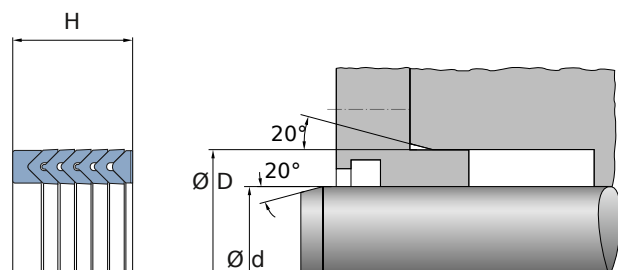



Chevron type seal set Merkel® DMS7-0889

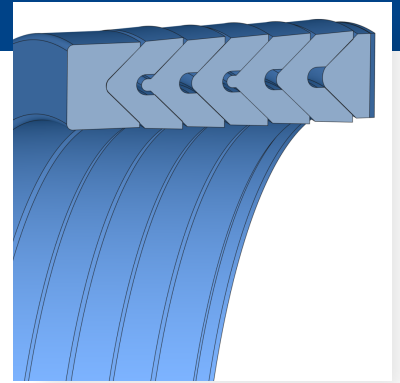

The information provided herein is based on laboratory tests and on data sources deemed reliable. It constitutes general, non-binding guideline values and does not represent any guarantee of specific properties or suitability for a particular purpose. The suitability of a product for a specific application depends on the actual operating conditions and a variety of factors. Full testing and performance evaluation of the final product are the responsibility of the user. Freudenberg FST GmbH | www.fst.com