


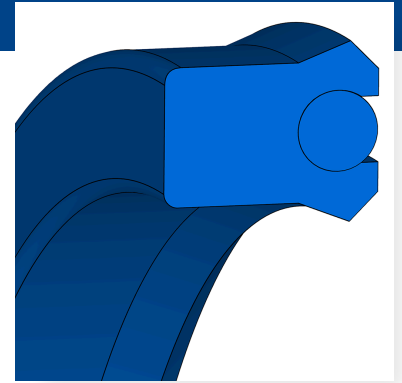

Rod seal LSU-B

DESCRIPTION

- Symmetrical
- Single acting
- Compact design
- O-ring as sealing and preloading element
- recessed sealing lip

FUNCTION

- For radially narrow installation spaces
- Symmetrical profile enables use as piston and rod seal
- Use with one-sided pressure load
- Static sealing by O-ring in the low-pressure range, change to lip seal on activation

CONFORMITY AND CERTIFICATES


- Please consult the material data sheet valid for the respective material for current information on approvals and certificates, as this information depends on the compound and cannot be listed exhaustively here.

PRODUCT ADVANTAGES

- Wide range of applications
- Simple snap-on assembly
- Market-leading, proprietary design with the widest range of applications in all industries and for a variety of requirements
- Very good static and dynamic sealing effect
- Highest quality, durability and safety
- Best results in total cost of ownership


STORAGE ADVISE

- Storage temperature <25°C
- No direct heat sources
- No direct sunlight
- No condensation in the storage room
- No exposure to ozone or ionizing radiation
- Recommendations based on the revision of ISO 2230 dated 16.09.1992

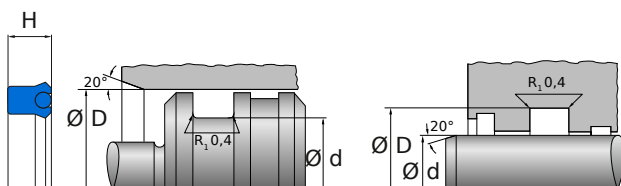



Rod seal LSU-B

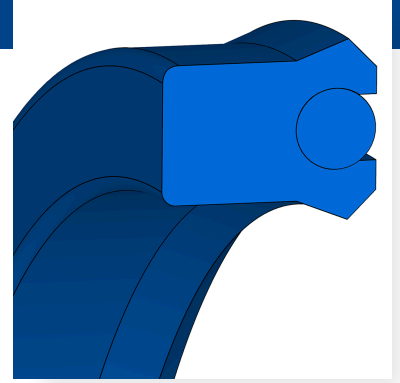

The information provided herein is based on laboratory tests and on data sources deemed reliable. It constitutes general, non-binding guideline values and does not represent any guarantee of specific properties or suitability for a particular purpose. The suitability of a product for a specific application depends on the actual operating conditions and a variety of factors. Full testing and performance evaluation of the final product are the responsibility of the user. Freudenberg FST GmbH | www.fst.com