

FREUDENBERG

U-Cup N100

DESCRIPTION

- Symmetrical
- Sharp, cut sealing edge

FUNCTION


- Symmetrical profile enables use as piston and rod seal
- Use with one-sided pressure load
- Preferably spare parts required

PRODUCT ADVANTAGES

- Wide range of applications
- Market-leading, proprietary design with the widest range of applications in all industries and for a variety of requirements
- Highest quality, durability and safety
- Best results in total cost of ownership

APPLICATIONS

- For new designs, we recommend more modern series, e.g. T20 (rod seal) or NA300 (piston seal)
- Mainly for spare parts requirements

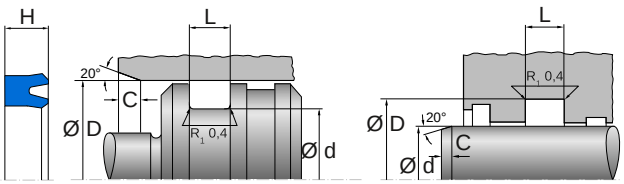

CONFORMITY AND CERTIFICATES

- Please consult the material data sheet valid for the respective material for current information on approvals and certificates, as this information depends on the compound and cannot be listed exhaustively here.

DESIGN GUIDELINE

- Sharp edges deburred or chamfered or rounded
- To avoid damage, cylinder tubes and piston rods must be chamfered, surface finish Rt=4m
- The length and angle of the installation chamfers must be designed according to the rod seal used
- Please follow the QR code or hyperlink to the technical manual to obtain further information and instructions.

FREUDENBERG
SEALING TECHNOLOGIES



FREUDENBERG

U-Cup N100

INSTALLATION GUIDELINE

- No machining residues, chips, dirt, etc.
- Do not pull the seal over sharp edges, threads, or keyways during installation; cover with an installation sleeve if necessary
- Oil or grease the seal, piston rod, and cylinder tube before installation
- Heating the seal in oil at 80°C to 100°C makes the seal material more elastic and easier to install
- Please follow the QR code or hyperlink to the technical manual to obtain further information and instructions.

STORAGE ADVISE

- Storage temperature <25°C
- No direct heat sources
- No direct sunlight
- No condensation in the storage room
- No exposure to ozone or ionizing radiation
- Recommendations based on the revision of ISO 2230 dated 16.09.1992

Pressure [MPa]

Sliding speed [m/s]

FREUDENBERG
SEALING TECHNOLOGIES



FREUDENBERG

U-Cup N100

Temperature [°C]

The values given are based on a limited number of tests on standard test specimens (2 mm sample plates) from laboratory production. The data determined from finished parts may deviate from the above values depending on the manufacturing process and the part geometry.

The information provided herein is based on laboratory tests and on data sources deemed reliable. It constitutes general, non-binding guideline values and does not represent any guarantee of specific properties or suitability for a particular purpose. The suitability of a product for a specific application depends on the actual operating conditions and a variety of factors. Full testing and performance evaluation of the final product are the responsibility of the user. Freudenberg FST GmbH | www.fst.com

FREUDENBERG
SEALING TECHNOLOGIES