


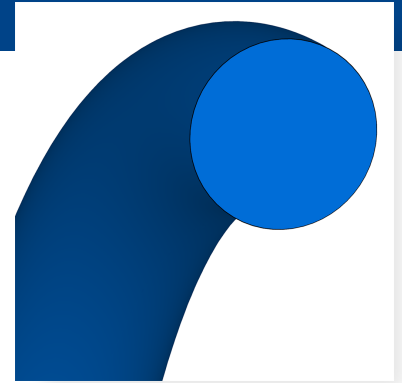

Polyurethane o-ring OR-PU

DESCRIPTION

- Endless, circular ring with circular cross-section

FUNCTION

- Sealing effect due to cross-sectional deformation after installation and axial or radial compression in the installation space
- In the operating state, media pressure reinforces the sealing function

PRODUCT ADVANTAGES

- Universally applicable
- Market-leading, proprietary design with the widest range of applications in all industries and for a variety of requirements
- Highest quality, durability and safety
- Best results in total cost of ownership


CONFORMITY AND CERTIFICATES


- Please consult the material data sheet valid for the respective material for current information on approvals and certificates, as this information depends on the compound and cannot be listed exhaustively here.
- Please follow the QR code or hyperlink to the technical manual to obtain further information and instructions.



DESIGN GUIDELINE

- Please refer to the technical manual for design
- Please follow the QR code or hyperlink to the technical manual to obtain further information and instructions.

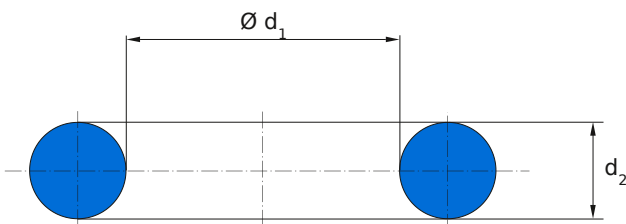

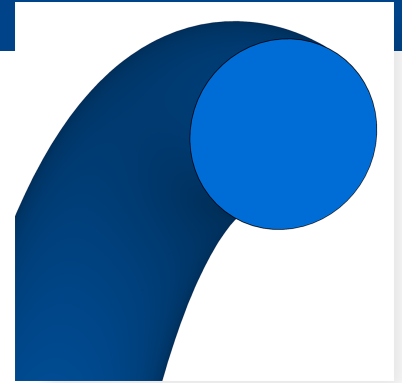

Polyurethane o-ring OR-PU

INSTALLATION GUIDELINE

- The prerequisite for perfect function of the seal is careful installation in accordance with the technical manual.
- Please follow the QR code or hyperlink to the technical manual to obtain further information and instructions.



STORAGE ADVISE

- Storage temperature <25°C
- No direct sunlight
- No condensation in the storage room
- No exposure to ozone or ionizing radiation
- Recommendations based on the revision of ISO 2230 dated 16.09.1992

The information provided herein is based on laboratory tests and on data sources deemed reliable. It constitutes general, non-binding guideline values and does not represent any guarantee of specific properties or suitability for a particular purpose. The suitability of a product for a specific application depends on the actual operating conditions and a variety of factors. Full testing and performance evaluation of the final product are the responsibility of the user. Freudenberg FST GmbH | www.fst.com