



Packing Merkel® Ramilon 4586



DESCRIPTION

- Braided and impregnated stuffing box packing
- Square cross-section

FUNCTION

- Sealing of rotating shafts or translating rods
- Sealing effect through axial compression using a gland follower

PRODUCT ADVANTAGES

- Long service life
- Does not swell or rot
- Excellent pressure resistance
- Extremely wear-resistant
- Impregnation process guarantees high cross-sectional density and low friction coefficients

APPLICATIONS


- Piston pumps
- Mills
- Packing materials approved for food applications (FDA)
- Refiners
- Riser pumps
- Centrifugal pumps

CONFORMITY AND CERTIFICATES

- Please consult the material data sheet valid for the respective material for current information on approvals and certificates, as this information depends on the compound and cannot be listed exhaustively here.

DESIGN GUIDELINE

- Avoid grooves, blowholes or scratches on the surface to be sealed
- Please follow the QR code or hyperlink to the technical manual to obtain further information and instructions.

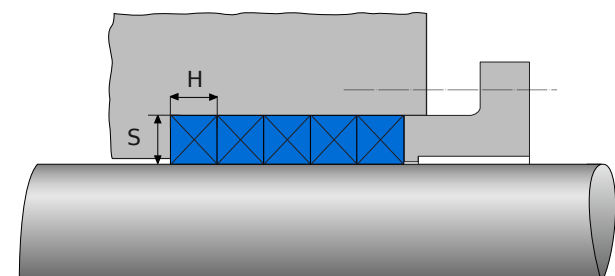



Packing Merkel® Ramilon 4586



INSTALLATION GUIDELINE

- Cut packings to length with butt or diagonal cut depending on application
- Install and press the rings individually with the cut ends first
- Distribute the cut ends symmetrically around the circumference to prevent leakage
- Tighten the cap nuts evenly
- Please follow the QR code or hyperlink to the technical manual to obtain further information and instructions.



STORAGE ADVISE

- Storage temperature <25°C
- No direct heat sources
- No direct sunlight
- No condensation in the storage room
- No exposure to ozone or ionizing radiation
- Recommendations based on the revision of ISO 2230 dated 16.09.1992

Pressure [MPa]

Anwendung	Pressure [MPa]
Centrifugal pumps	4
Plunger pumps	100

Speed [m/s]

Anwendung	Speed [m/s]
Centrifugal pumps	12.5
Plunger pumps	2



Packing Merkel® Ramilon 4586



pH value [pH]
5...11

Temperature [°C]
-40...120

The values given are based on a limited number of tests on standard test specimens (2 mm sample plates) from laboratory production. The data determined from finished parts may deviate from the above values depending on the manufacturing process and the part geometry.

The information provided herein is based on laboratory tests and on data sources deemed reliable. It constitutes general, non-binding guideline values and does not represent any guarantee of specific properties or suitability for a particular purpose. The suitability of a product for a specific application depends on the actual operating conditions and a variety of factors. Full testing and performance evaluation of the final product are the responsibility of the user. Freudenberg FST GmbH | www.fst.com