


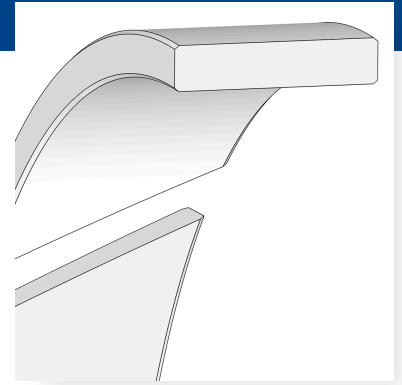

Piston guide ring PWR-PR30

DESCRIPTION

- Slotted

FUNCTION

- Dissipation of transverse forces
- Guiding of pistons
- Reduces the danger of metallic contact
- Ensures concentricity within the cylinder

PRODUCT ADVANTAGES


- Simple snap-on assembly
- Long service life
- Market-leading, proprietary design with the widest range of applications in all industries and for a variety of requirements
- Highest quality, durability and safety
- Extended cylinder life
- Best results in total cost of ownership

CONFORMITY AND CERTIFICATES

- Please consult the material data sheet valid for the respective material for current information on approvals and certificates, as this information depends on the compound and cannot be listed exhaustively here.


STORAGE ADVISE

- Storage temperature $<25^{\circ}\text{C}$
- No direct heat sources
- No direct sunlight
- No condensation in the storage room
- No exposure to ozone or ionizing radiation
- Recommendations based on the revision of ISO 2230 dated 16.09.1992

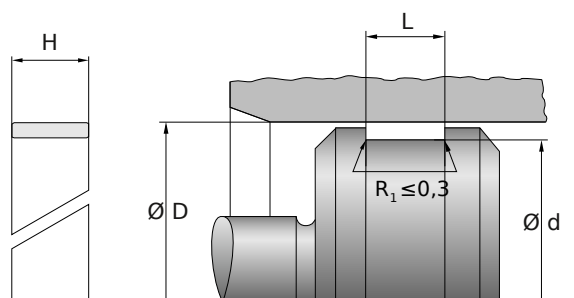



Piston guide ring PWR-PR30

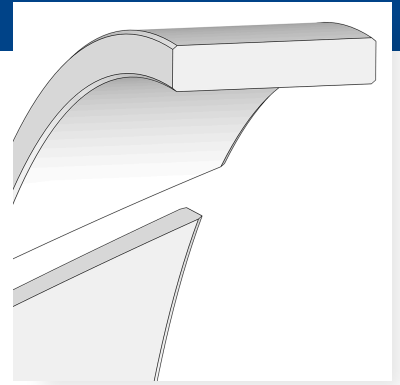

The information provided herein is based on laboratory tests and on data sources deemed reliable. It constitutes general, non-binding guideline values and does not represent any guarantee of specific properties or suitability for a particular purpose. The suitability of a product for a specific application depends on the actual operating conditions and a variety of factors. Full testing and performance evaluation of the final product are the responsibility of the user. Freudenberg FST GmbH | www.fst.com