




Radial shaft seal Merkel® Radiamatic R35 (dimension variant RADI 1635)

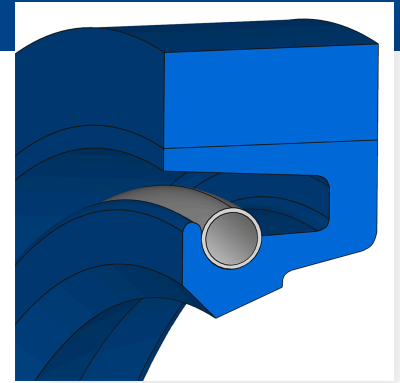

DESCRIPTION

- With tension spring
- Without protective lip
- Static part of seal made of elastomer fabric
- Installation in axially open installation space with cover
- Available with rubber lock for open installation

FUNCTION

- Dynamic sealing of rotating shafts, independent of direction of rotation
- For single arrangement with grease or oil lubrication
- Axial preload through cover in the installation space

CONFORMITY AND CERTIFICATES


- Please consult the material data sheet valid for the respective material for current information on approvals and certificates, as this information depends on the compound and cannot be listed exhaustively here.

PRODUCT ADVANTAGES

- Rubber lock enables open assembly on site
- Market-leading, proprietary design with the widest range of applications in all industries and for a variety of requirements
- Longest service life
- Highest quality, durability and safety
- Available as a joined version up to 3,500 mm
- Best results in total cost of ownership


STORAGE ADVISE

- Storage temperature <25°C
- No direct heat sources
- No direct sunlight
- No condensation in the storage room
- No exposure to ozone or ionizing radiation
- Recommendations based on the revision of ISO 2230 dated 16.09.1992

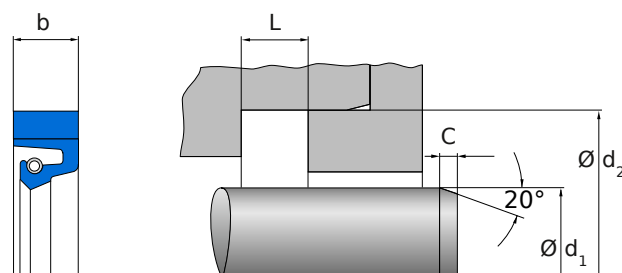



Radial shaft seal Merkel® Radiamatic R35 (dimension variant RADI 1635)

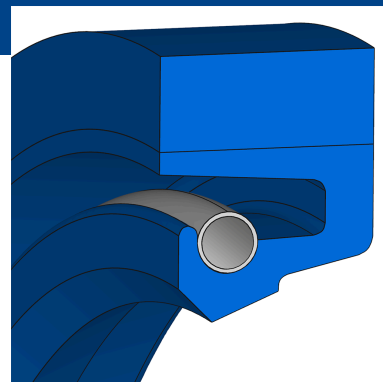

The information provided herein is based on laboratory tests and on data sources deemed reliable. It constitutes general, non-binding guideline values and does not represent any guarantee of specific properties or suitability for a particular purpose. The suitability of a product for a specific application depends on the actual operating conditions and a variety of factors. Full testing and performance evaluation of the final product are the responsibility of the user. Freudenberg FST GmbH | www.fst.com