


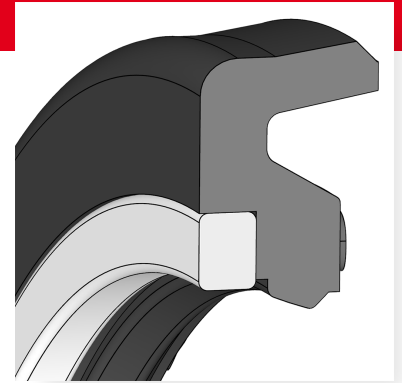

DICHTOMATIK

Rod seal S72

DESCRIPTION


- Asymmetrical
- Single acting
- Tight fit on the outer diameter
- Inner main lip
- Support ring

FUNCTION

- Sealing of piston rods
- Use with one-sided pressure load
- Support ring as gap closure element prevents gap extrusion

APPLICATIONS

- Use as a damping ring
- Mobile hydraulics

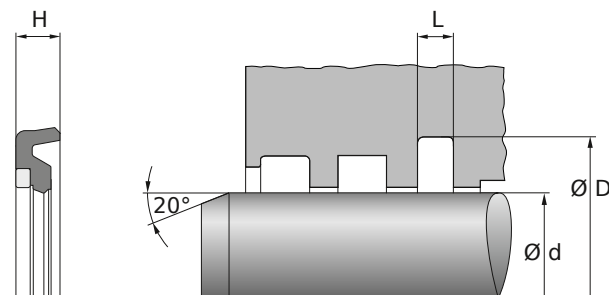

PRODUCT ADVANTAGES

- High wear resistance
- High extrusion reliability
- Reliable design with broad application spectrum for moderately demanding applications in general industry
- Pressure relief possible through sealing lip
- Good price/performance ratio
- Manufactured by certified external suppliers
- Rapid pressure build-up (nubs on end faces)
- Direct media backflow due to dimples on rear side

CONFORMITY AND CERTIFICATES

- Please consult the material data sheet valid for the respective material for current information on approvals and certificates, as this information depends on the compound and cannot be listed exhaustively here.

DESIGN GUIDELINE

- Installation space cleaned and free of deposits or old packing rings
- Please refer to the technical manual for design guidelines.
- Surface roughness of the groove flanks $Ra \leq 3 \mu m$
- With pulsating pressures, hardness of the o-ring should not be less than 80 Shore A
- Mating surface should be at right angles to the shaft



DICHTOMATIK



Rod seal S72

INSTALLATION GUIDELINE

- Axially accessible installation space required for small diameters
- Semi-open or closed installation spaces possible for a limited dimensional range
- Deburr sharp edges, provide with seamless chamfers and radii
- Clean the installation space carefully before installation, remove dust, dirt, metal chips, etc.
- Do not pull the seal over sharp edges, threads, or keyways during installation; cover with an installation sleeve if necessary
- Heating the seal in oil at 80°C to 100°C makes the seal material more elastic and easier to install
- Grease mounting surfaces and seal
- Oil or grease the piston rod before installation

STORAGE ADVISE

- Storage temperature <25°C
- No direct heat sources
- No direct sunlight
- No condensation in the storage room
- No exposure to ozone or ionizing radiation
- Recommendations based on the revision of ISO 2230 dated 16.09.1992

Pressure [MPa]


TPU

40

Speed [m/s]

TPU

0.5

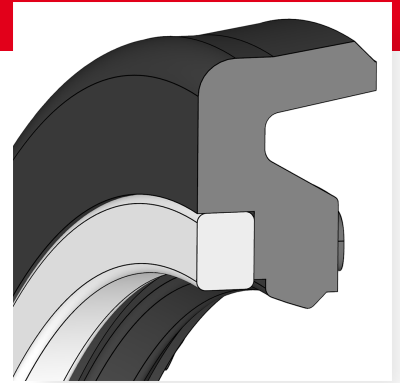

 DICHTOMATIK

Rod seal S72

Temperature [°C]

TPU

-30...100

The values given are based on a limited number of tests on standard test specimens (2 mm sample plates) from laboratory production. The data determined from finished parts may deviate from the above values depending on the manufacturing process and the part geometry.

The information provided herein is based on laboratory tests and on data sources deemed reliable. It constitutes general, non-binding guideline values and does not represent any guarantee of specific properties or suitability for a particular purpose. The suitability of a product for a specific application depends on the actual operating conditions and a variety of factors. Full testing and performance evaluation of the final product are the responsibility of the user. Freudenberg FST GmbH | www.fst.com

 DICHTOMATIK

 **FREUDENBERG**
SEALING TECHNOLOGIES