


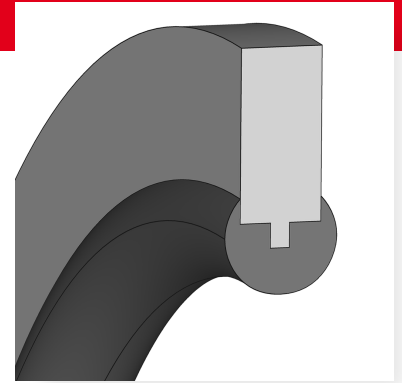

DICHTOMATIK

## Bonded seal USZO

### DESCRIPTION

- Elastomer sealing lip vulcanized on the inside
- Round lip design
- Material of metal ring: Standard steel SAE 1008 (1.0330) with zinc chromate coating (Cr VI-free), acid-resistant steel AISI 304 (1.4301)

### FUNCTION


- Protection against dirt from outside, prevents media leakage, no pressure loss
- Sealing effect due to compression of the elastomer lip

### APPLICATIONS

- Static sealing for screw connections and flange seals (mechanical engineering, tank and apparatus construction)

### INSTALLATION GUIDELINE

- Avoid any damage during installation
- Clean the installation space carefully before installation, remove dust, dirt, metal chips, etc.

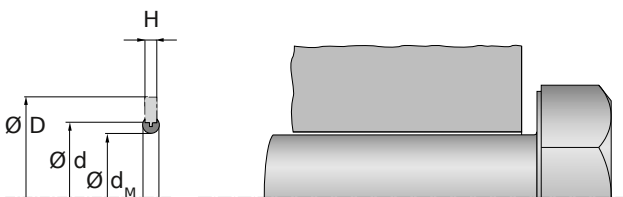

### PRODUCT ADVANTAGES

- Optimized sealing effect due to elimination of cavities
- Very good sealing effect
- Reliable design with broad application spectrum for moderately demanding applications in general industry
- Easy assembly and disassembly
- Metal washer ensures controlled pressing
- Good price/performance ratio
- Manufactured by certified external suppliers

### CONFORMITY AND CERTIFICATES

- Please consult the material data sheet valid for the respective material for current information on approvals and certificates, as this information depends on the compound and cannot be listed exhaustively here.

### DESIGN GUIDELINE

- Shaft surface roughness  $R_z = 1.0$  to  $4.0 \mu\text{m}$
- No surface shape deviations or defects such as sharp edges, burrs, blowholes, waviness, elevations or damage permitted
- Chamfer on shaft  $10-20^\circ$ , polished transition




DICHTOMATIK



DICHTOMATIK

## Bonded seal USZO

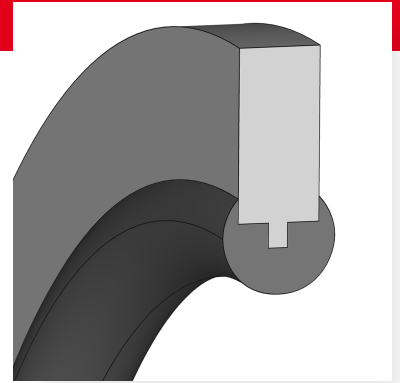

### STORAGE ADVISE

- Storage temperature <25°C
- No direct heat sources
- No direct sunlight
- No condensation in the storage room
- No exposure to ozone or ionizing radiation
- Recommendations based on the revision of ISO 2230 dated 16.09.1992

The information provided herein is based on laboratory tests and on data sources deemed reliable. It constitutes general, non-binding guideline values and does not represent any guarantee of specific properties or suitability for a particular purpose. The suitability of a product for a specific application depends on the actual operating conditions and a variety of factors. Full testing and performance evaluation of the final product are the responsibility of the user. Freudenberg FST GmbH | [www.fst.com](http://www.fst.com)



DICHTOMATIK



**FREUDENBERG**  
SEALING TECHNOLOGIES