


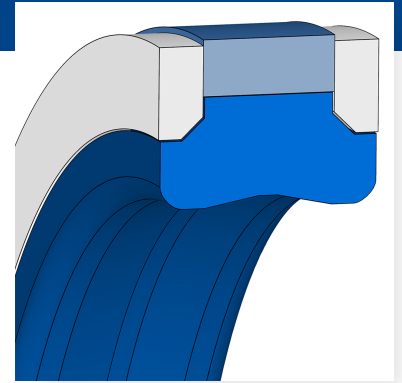

Piston seal VCT-SE

DESCRIPTION

- Symmetrical
- Double-acting
- Support rings
- Tight fit on inner diameter
- Profile ring as sealing and preloaded element

FUNCTION

- Sealing of pistons
- For pressure load from both sides
- Support ring as gap closure element prevents gap extrusion

PRODUCT ADVANTAGES


- Market-leading, proprietary design with the widest range of applications in all industries and for a variety of requirements
- Optimum force flow to the sealing edge via profile ring
- Highest quality, durability and safety
- Best results in total cost of ownership

CONFORMITY AND CERTIFICATES

- Please consult the material data sheet valid for the respective material for current information on approvals and certificates, as this information depends on the compound and cannot be listed exhaustively here.


STORAGE ADVISE

- Storage temperature <25°C
- No direct heat sources
- No direct sunlight
- No condensation in the storage room
- No exposure to ozone or ionizing radiation
- Recommendations based on the revision of ISO 2230 dated 16.09.1992

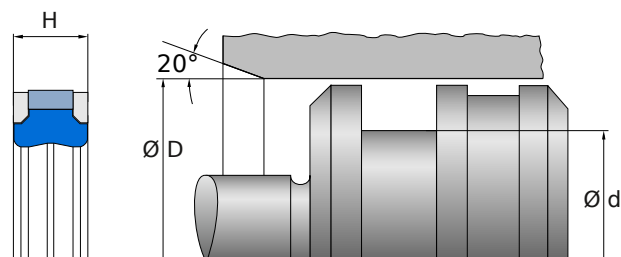



Piston seal VCT-SE

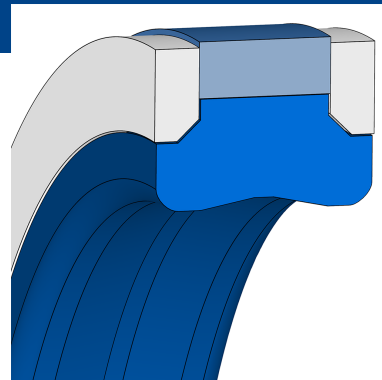

The information provided herein is based on laboratory tests and on data sources deemed reliable. It constitutes general, non-binding guideline values and does not represent any guarantee of specific properties or suitability for a particular purpose. The suitability of a product for a specific application depends on the actual operating conditions and a variety of factors. Full testing and performance evaluation of the final product are the responsibility of the user. Freudenberg FST GmbH | www.fst.com