


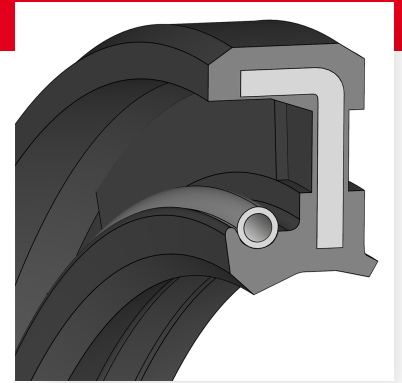

DICHTOMATIK


Radial shaft seal WASY

DESCRIPTION

- With tension spring
- Rubberized outer jacket
- With protective lip
- Shortened sealing lip

FUNCTION

- Dynamic sealing of rotating shafts, independent of direction of rotation
- Good static seal between sealing lip and shaft at standstill
- Rubberized outer jacket ensures tight fit and seal to housing bore
- Shortened sealing lip allows higher operating pressure
- Protective lip against dirt accumulation from outside

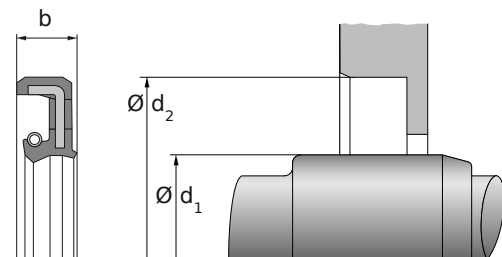

PRODUCT ADVANTAGES

- Good static sealing effect with low-viscosity or gaseous media
- Long service life
- Reliable design with broad application spectrum for moderately demanding applications in general industry
- Protection against moderate to medium dust and dirt accumulation from outside
- Compensates for thermal expansion, e.g. in light metal housings, good sealing effect with greater roughness and with split housings
- Good price/performance ratio
- Manufactured by certified external suppliers

APPLICATIONS


- Sealing of rotating machine elements (shafts, hubs, axles)
- Use in pressurized applications
- Hydraulic motors
- Pumps

CONFORMITY AND CERTIFICATES

- Please consult the material data sheet valid for the respective material for current information on approvals and certificates, as this information depends on the compound and cannot be listed exhaustively here.



DICHTOMATIK

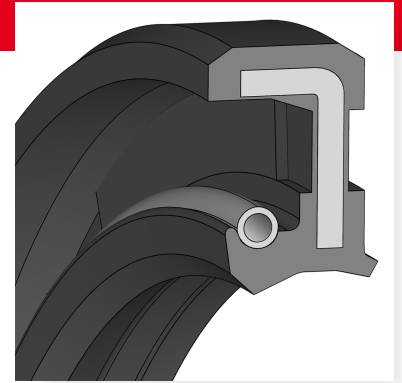

DICHTOMATIK

Radial shaft seal WASY

DESIGN GUIDELINE

- Shaft must be provided with a chamfer for mounting
- Design of the installation space is recommended in accordance with DIN 3760.
- Roundness of shaft - tolerance class IT8 - free of twists, burrs and damage of any kind
- Shaft tolerance zone: ISO h11
- Hardness of shaft surface min. 45 HRC
- Housing surface roughness $R_z = 10$ to $20 \mu\text{m}$
- Housing tolerance zone: ISO H8

INSTALLATION GUIDELINE

- Clean the installation space carefully before installation, remove dust, dirt, metal chips, etc.
- Do not pull the seal over sharp edges, threads, or keyways during installation; cover with an installation sleeve if necessary
- Do not grease the seal or installation space for assembly
- Careful installation on the shaft, tilting is not permitted

Pressure [MPa]

NBR	FKM
1	1

Sliding speed [m/s]


NBR	FKM
8	8

STORAGE ADVISE

- Storage temperature $< 25^\circ\text{C}$
- No direct heat sources
- No direct sunlight
- No condensation in the storage room
- No exposure to ozone or ionizing radiation
- Recommendations based on the revision of ISO 2230 dated 16.09.1992



DICHTOMATIK

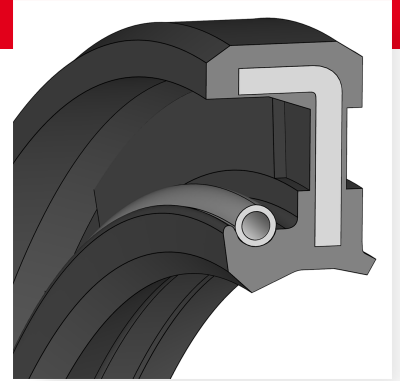

Radial shaft seal WASY

Temperature [°C]

NBR	FKM
-40...80 (a)	-25...150

a = short-term 100°C

The values given are based on a limited number of tests on standard test specimens (2 mm sample plates) from laboratory production. The data determined from finished parts may deviate from the above values depending on the manufacturing process and the part geometry.

The information provided herein is based on laboratory tests and on data sources deemed reliable. It constitutes general, non-binding guideline values and does not represent any guarantee of specific properties or suitability for a particular purpose. The suitability of a product for a specific application depends on the actual operating conditions and a variety of factors. Full testing and performance evaluation of the final product are the responsibility of the user. Freudenberg FST GmbH | www.fst.com

