


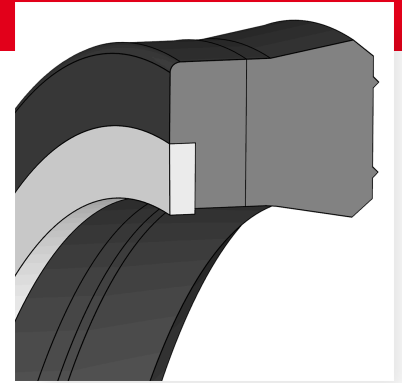

DICHTOMATIK

U-Cup SNI07

DESCRIPTION

- Asymmetrical
- Single acting
- Compact design
- Tight fit on the outer diameter
- Inner main lip
- Support ring

FUNCTION

- Sealing of piston rods
- Use with one-sided pressure load
- Support ring as gap closure element prevents gap extrusion

PRODUCT ADVANTAGES

- High extrusion reliability
- Reliable design with broad application spectrum for moderately demanding applications in general industry
- Good price/performance ratio
- Manufactured by certified external suppliers

APPLICATIONS


- Hydraulics
- Standard cylinders

CONFORMITY AND CERTIFICATES

- Please consult the material data sheet valid for the respective material for current information on approvals and certificates, as this information depends on the compound and cannot be listed exhaustively here.

DESIGN GUIDELINE

- Installation space cleaned and free of deposits or old packing rings
- Please refer to the technical manual for design guidelines.
- Surface roughness of the groove flanks $Ra \leq 3 \mu m$
- With pulsating pressures, hardness of the o-ring should not be less than 80 Shore A
- Mating surface should be at right angles to the shaft

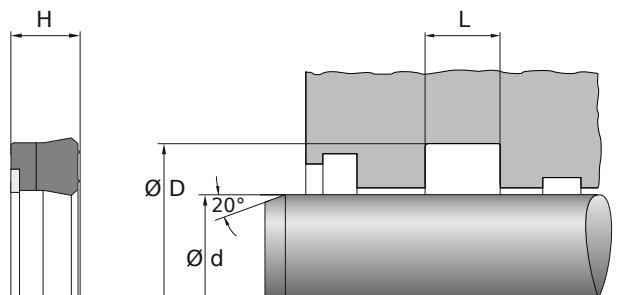


DICHTOMATIK



DICHTOMATIK

U-Cup SNI07

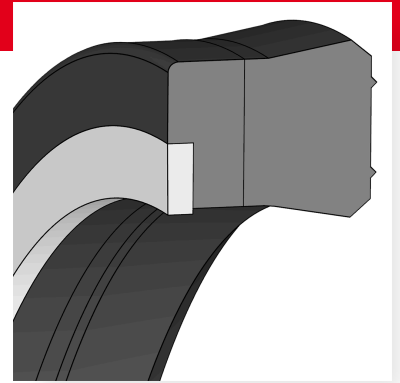

INSTALLATION GUIDELINE

- Installation in axially open groove
- Deburr sharp edges, provide with seamless chamfers and radii
- Clean the installation space carefully before installation, remove dust, dirt, metal chips, etc.
- Do not pull the seal over sharp edges, threads, or keyways during installation; cover with an installation sleeve if necessary
- Installation in cut groove only with mounting tool
- Oil or grease the piston rod before installation

STORAGE ADVISE

- Storage temperature <25°C
- No direct heat sources
- No direct sunlight
- No condensation in the storage room
- No exposure to ozone or ionizing radiation
- Recommendations based on the revision of ISO 2230 dated 16.09.1992

Pressure [MPa]

NBR

40

Temperature [°C]

NBR

-30...100

Sliding speed [m/s]

NBR

0.5

The values given are based on a limited number of tests on standard test specimens (2 mm sample plates) from laboratory production. The data determined from finished parts may deviate from the above values depending on the manufacturing process and the part geometry.




DICHTOMATIK



FREUDENBERG
SEALING TECHNOLOGIES



U-Cup SNI07

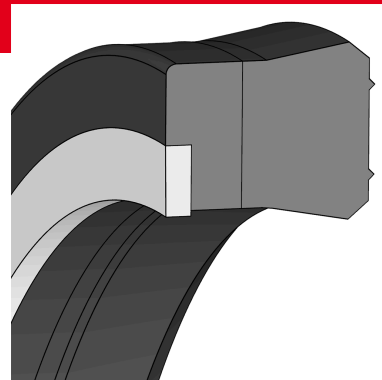

The information provided herein is based on laboratory tests and on data sources deemed reliable. It constitutes general, non-binding guideline values and does not represent any guarantee of specific properties or suitability for a particular purpose. The suitability of a product for a specific application depends on the actual operating conditions and a variety of factors. Full testing and performance evaluation of the final product are the responsibility of the user. Freudenberg FST GmbH | www.fst.com